Designed and manufactured in an environmentally conscious manner from materials that are biodegradable. toxin free, petroleum distillate free, **VOC** compliant and contain no ozone depletors.

CAUTION: Contains Poly-(oxy-1,2ethanediyl)-alpha-undecyl-omega (34398-01-1) and Alcohols, C12-13 ethoxylated (66455-14-9). Do not use near heat, sparks or open flame.

FIRST AID:

IF EYE CONTACT: Flush with large amounts of cool running water for at least 15 minutes while holding upper and lower lids open. If irritation persists get medical attention immediately.

EXCESSIVE SKIN EXPOSURE: Wash with soap and water. If irritation persists seek medical attention.

EXCESSIVE INHALATION: Remove to fresh air. Seek medical attention immediately. If breathing stops give artificial respiration.


IF INGESTED: Do not induce vomiting. Seek medical attention immediately.

HMIS RATING: Health, 1; Flammability, 1; Reactivity, 0; Personal Protection, B.

HANDLING AND STORAGE: Keep container closed except when in use. Do not store in unmarked containers. Store in a cool, dry place. Do not cut or weld on or near this container even when empty.

> For further information consult Material Safety Data Sheet.



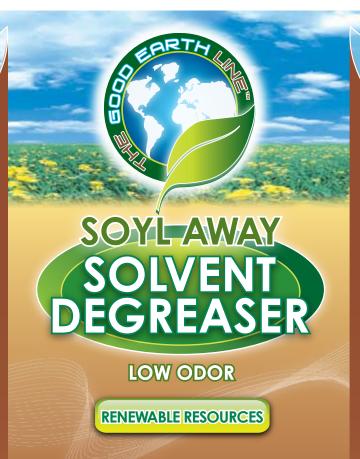

- **CONTROLLED EVAPORATION**
- WATER RINSABLE
- PLASTIC SAFE
- HIGH FLASH

CAUTION:

KEEP OUT OF REACH OF CHILDREN SEE OTHER CAUTIONS ON SIDE PANEL

NET CONTENTS: 5 GALLONS

TERAND INDUSTRIES, INC.

MADEINTHEUSA P.O. Box 667770 • Pompano Beach, FL 33066 www.terandstore.com

Designed and manufactured in an environmentally conscious manner from materials that are biodegradable. toxin free, petroleum distillate free, **VOC** compliant and contain no ozone depletors.

An industrial strength cleaning solvent made from all natural soy bean oil. Contains no water, terpene or citrus oil. Soyl Away has controlled evaporation to enable it to have the time to penetrate through, and dissolve grease, oil, tar and other solvent-based dirt. The product has a high flash point in excess of 200°F.

The product is safe for use on most plastic surfaces and is very low odor which enables use in confined areas. Surfaces can be wiped clean to leave a residual protective coating or residue-free cleaning can be accomplished with a water rinse. Quickly degreases Industrial Parts & Equipment, Engines, Tools, Construction Equipment, Generators, Pumps, etc.

DIRECTIONS: Apply undiluted to the soiled surface. Allow product to stand 3 to 5 minutes for deep penetration. For best results, agitate surface while product is penetrating. Rinse with water (high pressure where possible.)

NOTE: Product left on surface without water rinse may be slightly oily. Product is emulsifiable so that surfaces flushed with clean water will be residue free.

To learn more about these products go to: www.GOODEARTHLINE.COM