

# TERAND

The Maintenance Professional's Choice



TECHNO SOLUTIONS WORLD


PO Box 375122 Cayey, PR 00737-5122  
P. 787-738-0087, 0088 Fx. 1-888-456-0656  
[www.technosw.com](http://www.technosw.com), [sales@technosw.com](mailto:sales@technosw.com)

## OPEN GEAR LUBRICANT


78014

### FOR USE ON:

- Passenger and Freight Elevators
- Drag Lines • Mining Equipment • Cranes
- Construction Equipment • Tug Boats
- Dredging and Earth Moving Equipment
- Textile and Steel Mill Machinery
- Winches • Marine Equipment
- Offshore Drilling Rigs

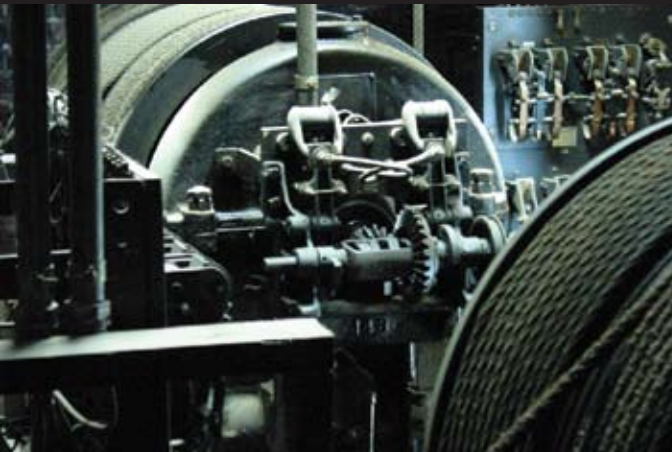

A super tough, adhesive type lubricant which penetrates deep into gears, cables and heavy duty mechanisms. Thickens quickly to a tacky, black stringy lube. Provides a Molybdenum Disulfide shield which maintains a cushion of lubricant between gear teeth and other friction-producing surfaces. Absorbs high shock loads, extreme pressure and prevents chipping and scuffing. Forms a protective, water-resistant coating that prevents corrosion in outdoor and even underwater applications.

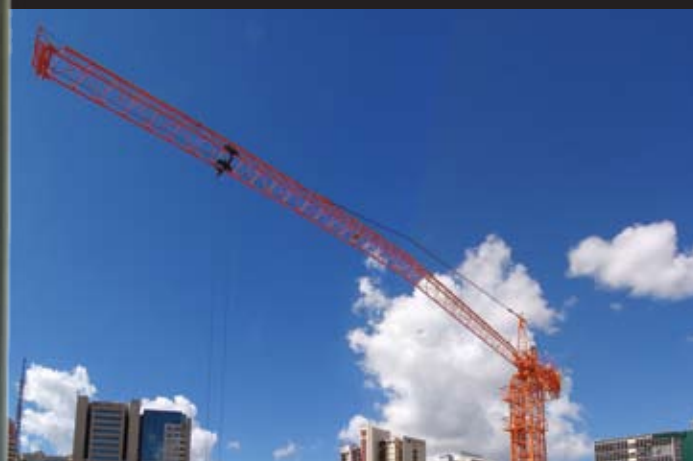

- Becomes Tacky Quickly • Non-Acid
- Non-Toxic • Non-Corrosive
- Prolongs Gear and Equipment Life

- Will NOT Sling Off, Drip, Melt, Dry Out or Build Up Between Gear Teeth
- Re-Lubricates with each Gear Revolution
- Formulated to Stay Tacky